


NIMH RECHARGEABLE BUTTON BATTERY


SPECIFICATIONS

Model	:	MH80B2
Description	:	NiMH rechargeable button cell battery
Nominal Capacity	:	80 mAh at 16mA rate discharge
Nominal Voltage	:	1.2 Volt
Cut-Off Voltage	:	1.0 Volt
End of Charge Voltage	:	≤ 1.6 Volt
End of Discharge Voltage	:	≥ 0.9 Volt
Weight	:	3.5 gram
Life Duration	:	≥ 500 cycles (Comply to IEC 285/1993 4.4.1)
Charge	:	Trickle - 2.4-4.0 mA Standard - 8 mA x 14 hours Quick - 16 mA x 6 hours (with cut-off control)
Recharge	:	Every 3-6 months recommended
Temperature Environment	:	Charge - 0 degC to 45 degC Discharge - -10 degC to 45 degC Storage - -20 degC to 55 degC
Trickle Charge	:	2.4mA for 28 days, no leakage, no explosion
Charge Retention	:	$>60\%$ for 28 days storage after standard charge
Leakage	:	No leakage, No explosion under standard operating condition
Vibration	:	Battery remain normal after vibration at Amp: 4mm; Freq.: 1000/min for 60 min.
Shock	:	Battery remain normal after dropping from 450mm to an Oak board for 3 times



Typical Standard Charge Characteristics (Button Cell)

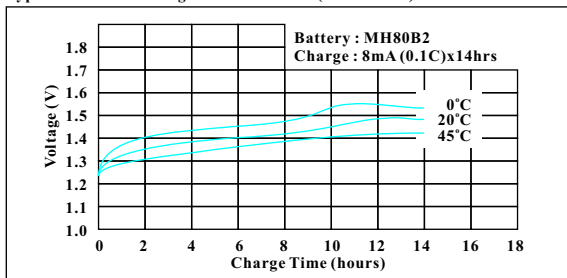


Typical Quick Charge Characteristics (Button Cell)

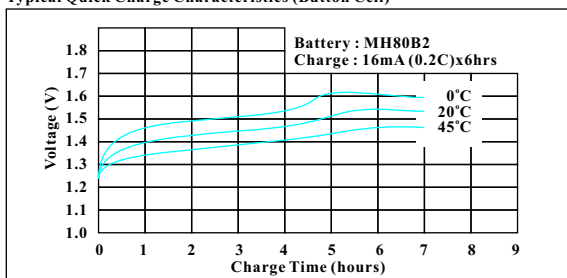

Typical Discharge Characteristics (Button Cell)

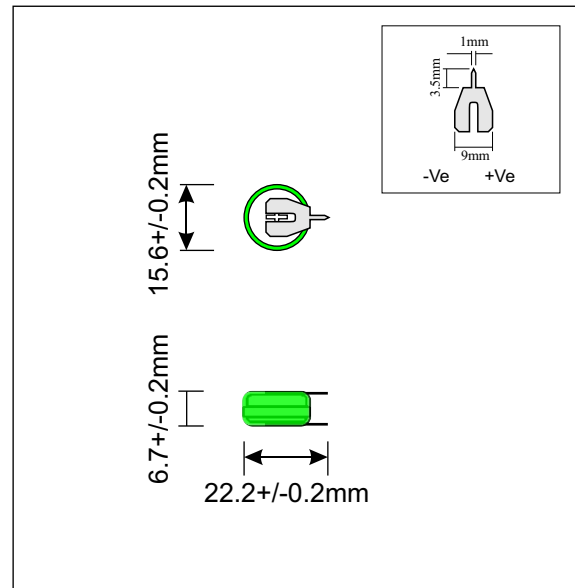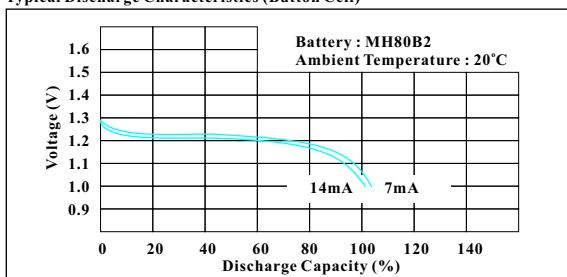

Typical Storage Characteristics (Button Cell)

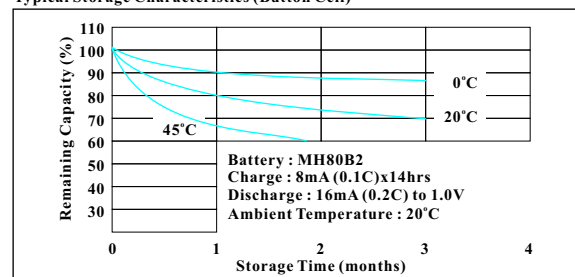

Information is for references only.

Model : MH80B2
Version : 2.1

WELL LINK INDUSTRIAL LIMITED

YCA03-1